



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : E21B 7/18, 21/00, 10/64</p>	<p>A1</p>	<p>(11) International Publication Number: WO 00/66872</p> <p>(43) International Publication Date: 9 November 2000 (09.11.00)</p>
<p>(21) International Application Number: PCT/EP00/04180</p> <p>(22) International Filing Date: 27 April 2000 (27.04.00)</p> <p>(30) Priority Data: 99303307.5 28 April 1999 (28.04.99) EP</p> <p>(71) Applicant (for all designated States except CA): SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V. [NL/NL]; Carel Van Bylandtlaan 30, NL-2596 HR The Hague (NL).</p> <p>(71) Applicant (for CA only): SHELL CANADA LIMITED [CA/CA]; 400 - 4th Avenue S.W., Calgary, Alberta T2P 2H5 (CA).</p> <p>(72) Inventor: BLANGE, Jan, Jette; Volmerlaan 8, NL-2288 GD Rijswijk (NL).</p>		<p>(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report. With amended claims and statement.</p>
<p>(54) Title: ABRASIVE JET DRILLING ASSEMBLY</p> <p>(57) Abstract</p> <p>A drilling assembly for drilling a borehole into an earth formation is provided, comprising drill string extending into the borehole and a jetting device arranged at a lower part of the drill string, the jetting device being provided with a mixing chamber having a first inlet in fluid communication with a drilling fluid supply conduit, a second inlet for abrasive particles and an outlet which is in fluid communication with a jetting nozzle arranged to jet a stream of abrasive particles and drilling fluid against at least one of the borehole bottom and the borehole wall. The jetting device is further provided with an abrasive particles recirculation system for separating the abrasive particles from the drilling fluid at a selected location where the stream flows from said at least one of the borehole bottom and the borehole wall towards the upper end of the borehole and for supplying the separated abrasive particles to the second inlet.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

ABRASIVE JET DRILLING ASSEMBLY

The present invention relates to a drilling assembly for drilling a borehole into an earth formation, comprising a drill string extending into the borehole and a jetting device arranged at the lower end of the drill string. The jetting device ejects a high velocity stream of drilling fluid against the rock formation so as to erode the rock and thereby to drill the borehole. In order to improve the rate of penetration of the drill string it has been proposed to mix abrasive particles into the jet stream.

One such system is disclosed in US patent No. 3,838,742 wherein a drill string is provided with a drill bit having a number of outlet nozzles. Drilling fluid containing abrasive particles is pumped via the drill string through the nozzles to produce high velocity jets impacting against the borehole bottom. The abrasive particles accelerate the erosion process compared to jetting of drilling fluid only. The rock cuttings are entrained into the stream which returns through the annular space between the drill string and the borehole wall to surface. After removal of the rock cuttings from the stream, the pumping cycle is repeated. A drawback of the known system is that continuous circulation of the abrasive particles through the pumping equipment and the drill string leads to accelerated wear of these components. Another drawback of the known system is that constraints are imposed on the rheological properties of the drilling fluid, for example a relatively high viscosity is required for the fluid to transport the abrasive particles upwardly through the annular space.

It is an object of the invention to provide an improved drilling assembly for drilling a borehole into an earth formation, which overcomes the drawbacks of the known system and which provides an increased rate of penetration without accelerated wear of the drilling assembly components.

In accordance with the invention there is provided a drilling assembly for drilling a borehole into an earth formation, comprising a drill string extending into the borehole and a jetting device arranged at a lower part of the drill string, the jetting device being provided with a mixing chamber having a first inlet in fluid communication with a drilling fluid supply conduit, a second inlet for abrasive particles and an outlet which is in fluid communication with a jetting nozzle arranged to jet a stream of abrasive particles and drilling fluid against at least one of the borehole bottom and the borehole wall, the jetting device further being provided with an abrasive particles recirculation system for separating the abrasive particles from the drilling fluid at a selected location where the stream flows from said at least one of the borehole bottom and the borehole wall towards the upper end of the borehole and for supplying the separated abrasive particles to the second inlet.

The abrasive particle recirculation system separates the abrasive particles from the stream after impact of the stream against the rock formation, and returns the abrasive particles to the mixing chamber. The remainder of the stream which is, apart from the drill cuttings, substantially free of abrasive particles, returns to surface and is recycled through the drilling assembly after removal of the drill cuttings. It is thereby achieved that the abrasive particles circulate through the lower part of the drilling assembly only while the drilling fluid which is substantially free of abrasive

particles circulates through the pumping equipment, and that no constraints are imposed on the rheological properties of the drilling fluid regarding transportation of the abrasive particles to surface.

5 Suitably the recirculation system includes means for creating a magnetic field in the stream, and the abrasive particles include a material subjected to magnetic forces induced by the magnetic field, the magnetic field being generated such that the abrasive particles are separated
10 from the drilling fluid by said magnetic forces. The means for creating the magnetic field comprises, for example, at least one magnet.

 In a preferred embodiment, the drill string is at the lower end thereof provided with a drill bit, and the
15 jetting nozzle is arranged to jet the stream of abrasive particles and drilling fluid against the wall of the borehole as drilled by the drill bit so as to enlarge the borehole diameter to a diameter significantly larger than the diameter of the drill bit. By drilling the borehole
20 using the drill bit and enlarging the borehole diameter to a diameter significantly larger than the diameter of the drill bit, a tubular such as a casing or a liner can be installed in the borehole while the drill string is still present in the borehole. The drill string and drill
25 bit can thereafter be retrieved to surface through the tubular.

 The tubular to be installed in the borehole can be formed by the drill string, in which case the drill
string has an inner diameter larger than the outer
30 diameter of the drill bit, the drill bit being detachable from the drill string and being provided with means for detaching the drill bit from the drill string and for retrieving the drill bit through the drill string to surface.

The invention will be described hereinafter in more detail and by way of example, with reference to the accompanying drawings in which

5 Fig. 1 schematically shows a longitudinal cross-section of an embodiment of the drilling assembly according to the invention;

Fig. 2 schematically shows a detail in perspective view in direction II of Fig. 1;

10 Fig. 3 schematically shows a component applied in the embodiment of Fig. 1;

Fig. 4 schematically shows an alternative embodiment of the drilling assembly according to the invention; and

15 Fig. 5 schematically shows another alternative embodiment of the drilling assembly according to the invention.

In the Figures, like reference numerals relate to like components.

20 In Fig. 1 is shown a drilling assembly including a drill string 1 extending into a borehole 2 formed in an earth formation 3 and a jetting device 5 arranged at the lower end of the drill string 1 near the bottom 7 of the borehole 2, whereby an annular space 8 is formed between the drilling assembly 1 and the wall of the borehole 2. The drill string 1 and the jetting device 5 are provided with a fluid passage 9, 9a for drilling fluid to be
25 jetted against the borehole bottom as described below. The jetting device 5 has a body 5a provided with a mixing chamber 10 having a first inlet in the form of inlet nozzle 12 in fluid communication with the fluid
30 passage 9, 9a, a second inlet 14 for abrasive particles and an outlet in the form of jetting nozzle 15 directed to the borehole bottom 7. The jetting device 5 is furthermore provided with an extension 5c in longitudinal direction of the drill string 1 to keep the jetting

nozzle 15 at a selected distance from the borehole bottom 7.

As shown in Fig. 2 the body 5a is provided with a niche 18 having a semi-cylindrical side wall 19 and being in fluid communication with the mixing chamber 10 and with the second inlet 14. The niche 18 and the second inlet 14 are formed as a single recess in the body 5a. A rotatable cylinder 16 is arranged in the niche 18, the diameter of the cylinder being such that only a small clearance is present between the cylinder 16 and the side wall 19 of the niche 18 (in Fig. 2 the cylinder 16 has been removed for clarity purposes). The axis of rotation 20 of the cylinder 16 extends substantially perpendicular to the inlet nozzle 12. The second inlet 14 and the mixing chamber 10 each have a side wall formed by the outer surface of the cylinder 16. The second inlet 14 furthermore has guide elements in the form of opposite side walls 22, 24 which converge in inward direction to the mixing chamber 10 and which extend substantially perpendicular to side wall 19 of niche 18.

As shown in Fig. 3 the outer surface of the cylinder 16 is provided with four magnets 26, 27, 28, 29, each magnet having two poles N, S extending in the form of polar bands in longitudinal direction of the cylinder 16. The magnets are made of a material containing rare earth elements such as Nd-Fe-B (e.g. $\text{Nd}_2\text{Fe}_{14}\text{B}$) or Sm-Co (e.g. SmCo_5 or $\text{Sm}_2\text{Co}_{17}$) or Sm-Fe-N (e.g. $\text{Sm}_2\text{Fe}_{17}\text{N}_3$). Such magnets have a high magnetic energy density, a high resistance to demagnetisation and a high Curie temperature (which is the temperature above which an irreversible reduction of magnetism occurs).

During an initial phase of normal operation of the drilling assembly 1, a stream of a mixture of drilling fluid and a quantity of abrasive particles is pumped via the fluid passage 9, 9a and the inlet nozzle 12 into the

mixing chamber 10. The abrasive particles contain a magnetically active material such as martensitic steel. Typical abrasive particles are martensitic steel shot or grit. The stream flows through the jetting nozzle 15 in the form of a jet stream 30 against the borehole bottom 7. After all abrasive particles have been pumped through the fluid passage 9, 9a, drilling fluid which is substantially free of abrasive particles is pumped through the passage 9, 9a and the inlet nozzle 12 into the mixing chamber 10.

By the impact of the jet stream 30 against the borehole bottom 7, rock particles are removed from the borehole bottom 7. The drill string 1 is simultaneously rotated so that the borehole bottom 7 is evenly eroded resulting in a gradual deepening of the borehole. The rock particles removed from the borehole bottom 7 are entrained in the stream which flows in upward direction through the annular space 8 and along the cylinder 16. The polar bands N, S of the cylinder 16 thereby are in contact with the stream flowing through the annular space 8 and induce a magnetic field into the stream. The magnetic field induces magnetic forces to the abrasive particles, which forces separate the abrasive particles from the stream and move the particles to the outer surface of the cylinder 16 to which the particles adhere. The cylinder 16 rotates in direction 21 firstly as a result of frictional forces exerted to the cylinder by the stream of drilling fluid flowing into the mixing chamber, and secondly as a result of frictional forces exerted to the cylinder by the stream flowing through the annular space 8. Thirdly, the high velocity flow of drilling fluid through the mixing chamber 10 generates a hydraulic pressure in the mixing chamber 10 significantly lower than the hydraulic pressure in the annular space 8. This pressure difference causes the fluid in niche 18 to

be sucked in the direction of mixing chamber 10. The more abrasives particles are adhered to the surface of the cylinder 16 in this area the more effective the pressure difference is driving the rotation of the cylinder 16.

5 Due to the rotation of the cylinder 16 the abrasive particles adhered to the outer surface of the cylinder 16 move through the second inlet 14 in the direction of the mixing chamber 10. The converging side walls 22, 24 of the second inlet 14 guide the abrasive particles into the
10 mixing chamber 10. Upon arrival of the particles in the mixing chamber 10 the stream of drilling fluid ejected from the inlet nozzle 12 removes the abrasive particles from the outer surface of the cylinder 16 whereafter the particles are entrained into the stream of drilling
15 fluid.

The remainder of the stream flowing through the annular space 8 is substantially free of abrasive particles and continues flowing upwardly to surface where the drill cuttings can be removed from the stream. After
20 removal of the drill cuttings the drilling fluid is again pumped through the fluid passage 9, 9a and the inlet nozzle 12, into the mixing chamber 10 so that the cycle described above is repeated.

It is thus achieved that drilling fluid substantially
25 free of abrasive particles circulates through the pumping equipment and the drilling assembly 1, while the abrasive particles circulate through the jetting device 5 only. Consequently the drill string 1, the borehole casing (if present) and the pumping equipment are not exposed to
30 continuous contact with the abrasive particles and are thereby less susceptible of wear. Should an incidental loss of abrasive particles in the borehole occur, such loss can be compensated for by feeding new abrasive particles through the drill string.

Instead of applying a small clearance between the cylinder 16 and the side wall 19 of the niche 18, no such clearance can present. This has the advantage that the risk of abrasive particles becoming entrained between the cylinder 16 and the side wall 19, is reduced. However, to allow the cylinder 16 to rotate the contact surfaces of the cylinder 16 and the niche 18 then should be very smooth.

Referring to Fig. 4 there is shown an alternative embodiment of the drilling assembly of the invention, wherein the means for creating a magnetic field in the stream is formed by an induction coil 40 wound around an inlet conduit 42 for abrasive particles. The inlet conduit 42 provides fluid communication between the annular space 8 and the mixing chamber 10, and converges in diameter in the direction from the annular space 8 to the mixing chamber 10. The diameter of the induction coil converges correspondingly.

During normal use of the alternative embodiment of Fig. 4, an electric current is supplied to the induction coil 40 thereby creating a magnetic field having a field strength which increases in the conduit 42 in the direction from the annular space 8 to the mixing chamber 10. The abrasive particles are attracted by the magnetic field and are thereby separated from the stream flowing in the annular space 8. Under the effect of the magnetic field the abrasive particles flow into the inlet conduit 42. As a result of the increasing field strength in inward direction in the conduit 42, the abrasive particles move through the inlet conduit 42 to the mixing chamber 10. Upon arrival of the abrasive particles in the mixing chamber 10 they mix with the drilling fluid entering the mixing chamber through the fluid inlet nozzle 12, and a stream of abrasive particles and drilling fluid is ejected through the outlet nozzle 15

against the borehole bottom 7. From the borehole bottom 7, the stream flows in upward direction through the annular space. The flow cycle of the abrasive particles via the inlet conduit 42 is then repeated, while the fluid substantially free of abrasive particles continues flowing upwardly through the annular space 8 to surface where the drill cuttings are removed. The drilling fluid is again pumped through the fluid passage 9, 9a and the inlet nozzle 12, into the mixing chamber 10 where the fluid again mixes with the abrasive particles, etc.

In Fig. 5 is shown a further modification of the drilling assembly of the invention, wherein the means for creating a magnetic field in the stream is formed by a recirculation surface 44 extending from the annular space 8 to the abrasive particles inlet 14, and the means for creating the magnetic field is arranged to create a moving magnetic field so as to move the abrasive particles along the recirculation surface 44 to the abrasive particles inlet. This is achieved by application of a series of polar shoes 46 along the recirculation surface 44, each polar shoe 46 being provided with an induction coil 48.

During normal use the polar shoes 46 are connected to a multi-phase current source, for example a 3-phase current source in a manner similar to the polar shoes of a stator of a conventional brushless electric induction motor. As a result a magnetic field is created which moves along the recirculation surface 44 in the direction of the mixing chamber 10, thereby moving the abrasive particles along the surface 44 to the mixing chamber 10. Upon arrival in the mixing chamber 10 the abrasive particles mix with the drilling fluid entering the mixing chamber through the fluid inlet nozzle 12, and a stream of abrasive particles and drilling fluid is ejected

through the outlet nozzle 15 against the borehole
bottom 7. From the borehole bottom 7, the stream flows
through the annular space 8 in upward direction. The flow
cycle of the abrasive particles via the recirculation
5 surface 44 is then repeated, while the fluid
substantially free of abrasive particles continues
flowing upwardly through the annular space 8 to surface
where the drill cuttings are removed. The drilling fluid
is again pumped through the fluid passage 9, 9a and the
10 inlet nozzle 12, into the mixing chamber 10 where the
fluid again mixes with the abrasive particles, etc.

It will be understood that many variations can be
made to the above example without departing from the
scope of the invention. For example, more than one inlet
15 nozzle, mixing chamber or outlet nozzle can be applied.
The profile of the borehole bottom, the dynamic stability
of the jetting device, and the borehole wall structure
can be influenced by varying the number and the
orientation of the outlet nozzles. More than one
20 rotatable cylinder can be applied, for example a second
cylinder arranged on the other side of the mixing chamber
and opposite the cylinder described above. Furthermore,
the cylinder can be oriented differently, for example
parallel to the longitudinal axis of the drilling
25 assembly. Instead of the stream of drilling fluid causing
rotation of the cylinder, the cylinder can for instance
be rotated by an electric motor, a fluidic motor, or by
generating a changing magnetic field which interacts with
the magnetic poles of the cylinder. Instead of applying
30 the cylinder, a rotatable member having a convex shape
conforming to the curvature of the bore hole wall can be
applied.

Instead of supplying the abrasive particles during
the initial phase of normal operation via the fluid
35 passage to the mixing chamber, the abrasive particles can

be stored in a storage chamber formed in the jetting device and fed to the mixing chamber through a suitable conduit.

Furthermore, the assembly of the invention can be applied to cut a window in a borehole casing, to drill out a borehole packer, to perform a work-over operation or to remove scale or junk from a borehole.

The performance of the drilling assembly or the concentration of abrasive particles in the jet stream can be monitored by providing the jetting device with one or more of the following sensors:

- a sensor that detects mechanical contact between the jetting device and the hole bottom, e.g. including strain gauges or displacement sensors;
- an induction coil for monitoring rotation of the cylinder, which coil can, for example, be arranged in the niche or in another recess formed in the body of the jetting device;
- an acoustic sensor for monitoring sound waves in the annular space between the drill string and the borehole wall, caused by the jet stream impacting the hole bottom;
- an acoustic sensor for monitoring sound produced in the mixing chamber and the outlet nozzle and for providing information on the degree of wear of the mixing chamber and the outlet nozzle.

Instead of, or in addition to, separating the abrasive particles from the fluid by magnetic forces, the recirculation system can be provided with means for exerting centrifugal forces to the abrasive particles at the selected location. For instance, one or more hydrocyclones and/or one or more centrifuges can be applied in this respect, for example a plurality of hydrocyclones in series arrangement.

C L A I M S

1. A drilling assembly for drilling a borehole into an earth formation, comprising a drill string extending into the borehole and a jetting device arranged at a lower part of the drill string, the jetting device being
5 provided with a mixing chamber having a first inlet in fluid communication with a drilling fluid supply conduit, a second inlet for abrasive particles and an outlet which is in fluid communication with a jetting nozzle arranged to jet a stream of abrasive particles and drilling fluid
10 against at least one of the borehole bottom and the borehole wall, the jetting device further being provided with an abrasive particles recirculation system for separating the abrasive particles from the drilling fluid at a selected location where the stream flows from said
15 at least one of the borehole bottom and the borehole wall towards the upper end of the borehole and for supplying the separated abrasive particles to the second inlet.
2. The drilling assembly of claim 1, wherein the recirculation system includes means for creating a
20 magnetic field in the stream, and the abrasive particles include a material subjected to magnetic forces induced by the magnetic field, the magnetic field being oriented such that the abrasive particles are separated from the drilling fluid by said magnetic forces.
- 25 3. The drilling assembly of claim 2, wherein the recirculation system includes a recirculation surface extending from said selected location to the second inlet, and the means for creating the magnetic field is arranged to create a moving magnetic field which induces
30 the abrasive particles to move along the recirculation surface to the second inlet.

4. The drilling assembly of claim 2 or 3, wherein the means for creating the magnetic field comprises at least one magnet.

5. The drilling assembly of claim 4, wherein each magnet is provided at a rotatable member having an outer surface extending between said selected location and the second inlet, the axis of rotation of the member being arranged so that during rotation of the member each magnet pole moves in the direction from said selected location to the second inlet, and wherein the recirculation system further includes means for rotating the rotatable member.

6. The drilling assembly of claim 5, wherein the means for rotating the rotatable member includes a nozzle formed by the first inlet.

7. The drilling assembly of claim 5 or 6, wherein the jetting device is provided with at least one guide element extending along the outer surface of the rotatable member and at a selected angle to the axis of rotation of the rotatable member so as to guide abrasive particles adhered to said outer surface to the second inlet.

8. The drilling assembly of any one of claims 5-7, wherein the poles of each magnet extend substantially parallel to the axis of rotation of the rotatable member.


9. The drilling assembly of any one of claims 5-8, wherein an annular space is formed between the drilling assembly and the borehole wall, and wherein said selected location where the abrasive particles are separated from the drilling fluid is in the annular space.

10. The drilling assembly of claim 9, wherein the shape of the rotatable member is selected from a cylindrical shape and a convex shape conforming to the curvature of the borehole wall in the vicinity of the rotatable member.

11. The drilling assembly of any of claims 2-10, wherein said material subjected to magnetic forces comprises at least one of a ferromagnetic, a ferrimagnetic and a paramagnetic material.
- 5 12. The drilling assembly of any one of claims 1-11, wherein the recirculation system includes means for separating the abrasive particles from the drilling fluid by centrifugal forces exerted to the particles.
- 10 13. The drilling assembly of any one of claims 1-12, wherein the drill string is at the lower end thereof provided with a drill bit, and the jetting nozzle is arranged to jet the stream of abrasive particles and drilling fluid against the wall of the borehole as drilled by the drill bit so as to enlarge the borehole diameter to a diameter significantly larger than the diameter of the drill bit.
- 15 14. The drilling assembly of claim 13, wherein the drill string has an inner diameter larger than the outer diameter of the drill bit, the drill bit being detachable from the drill string and being provided with means for detaching the drill bit from the drill string and for retrieving the drill bit through the drill string to surface.
- 20 15. The drilling assembly substantially as described hereinbefore with reference to the drawings.
- 25

1/4

Fig.1.

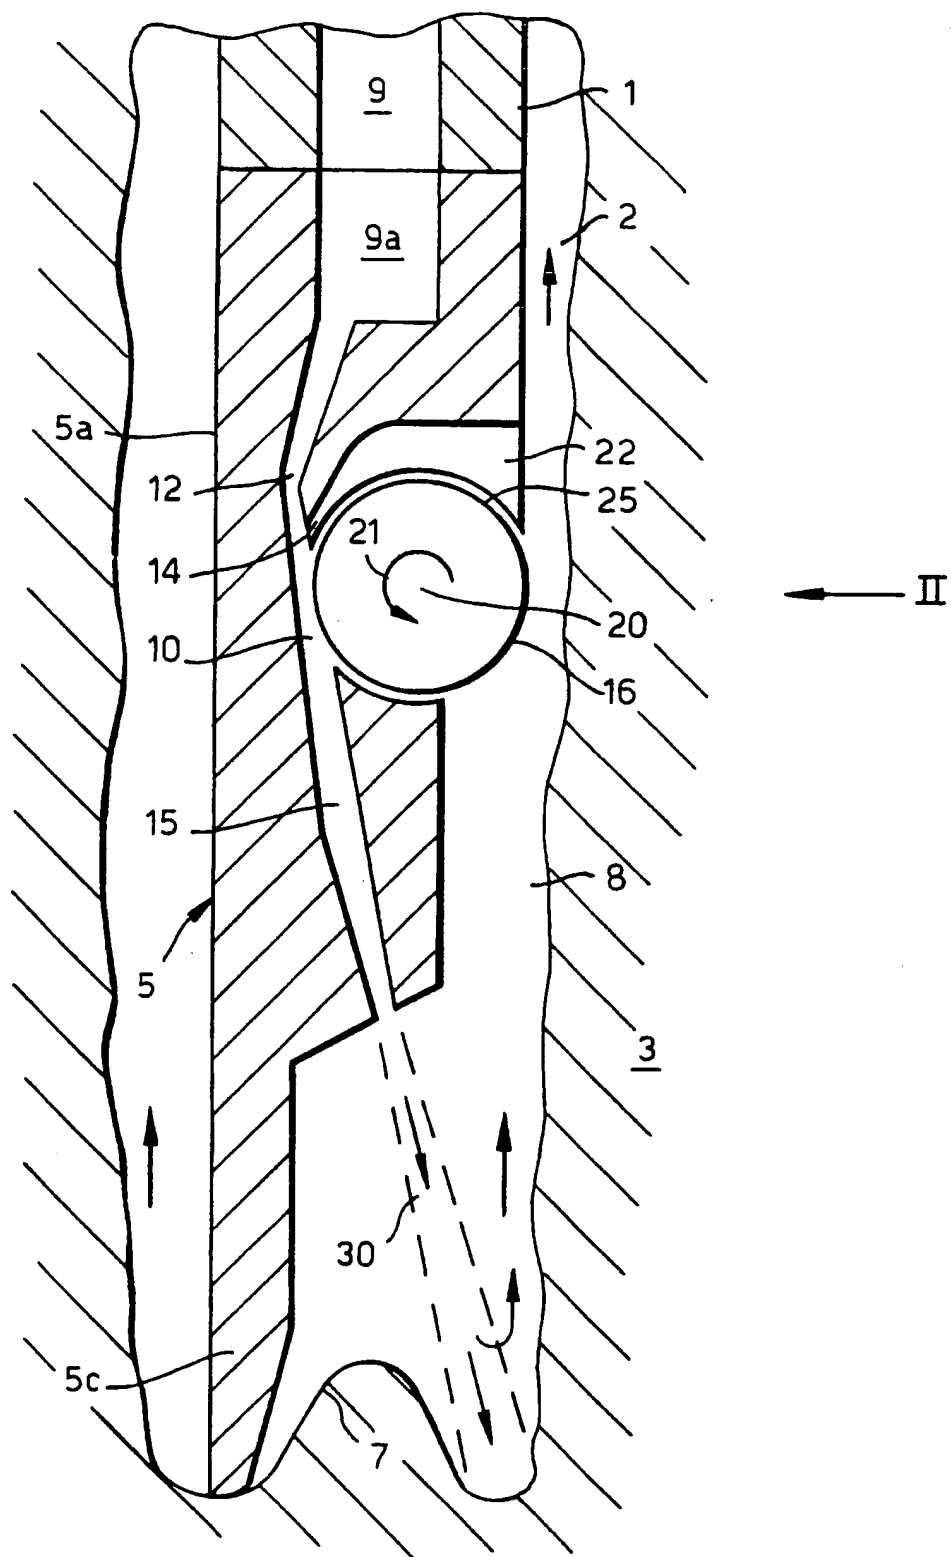

2/4

Fig.2.

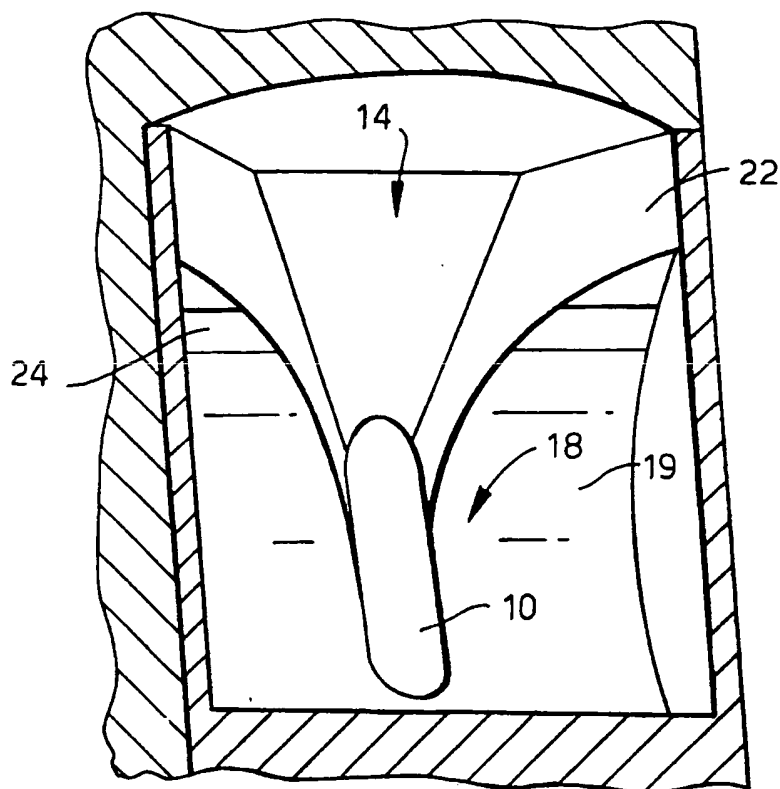


Fig.3.



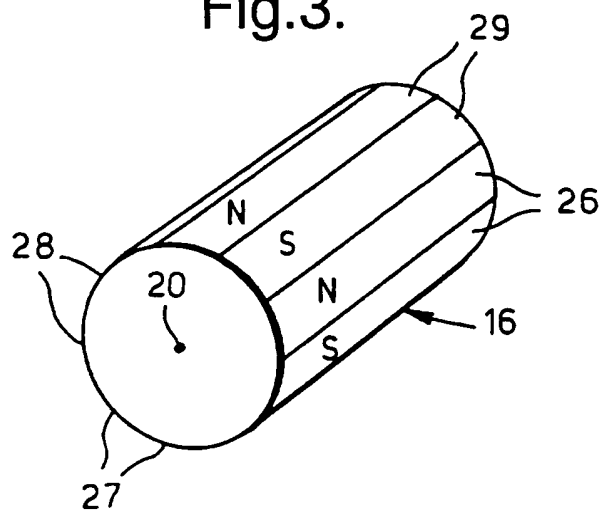


Fig.4.

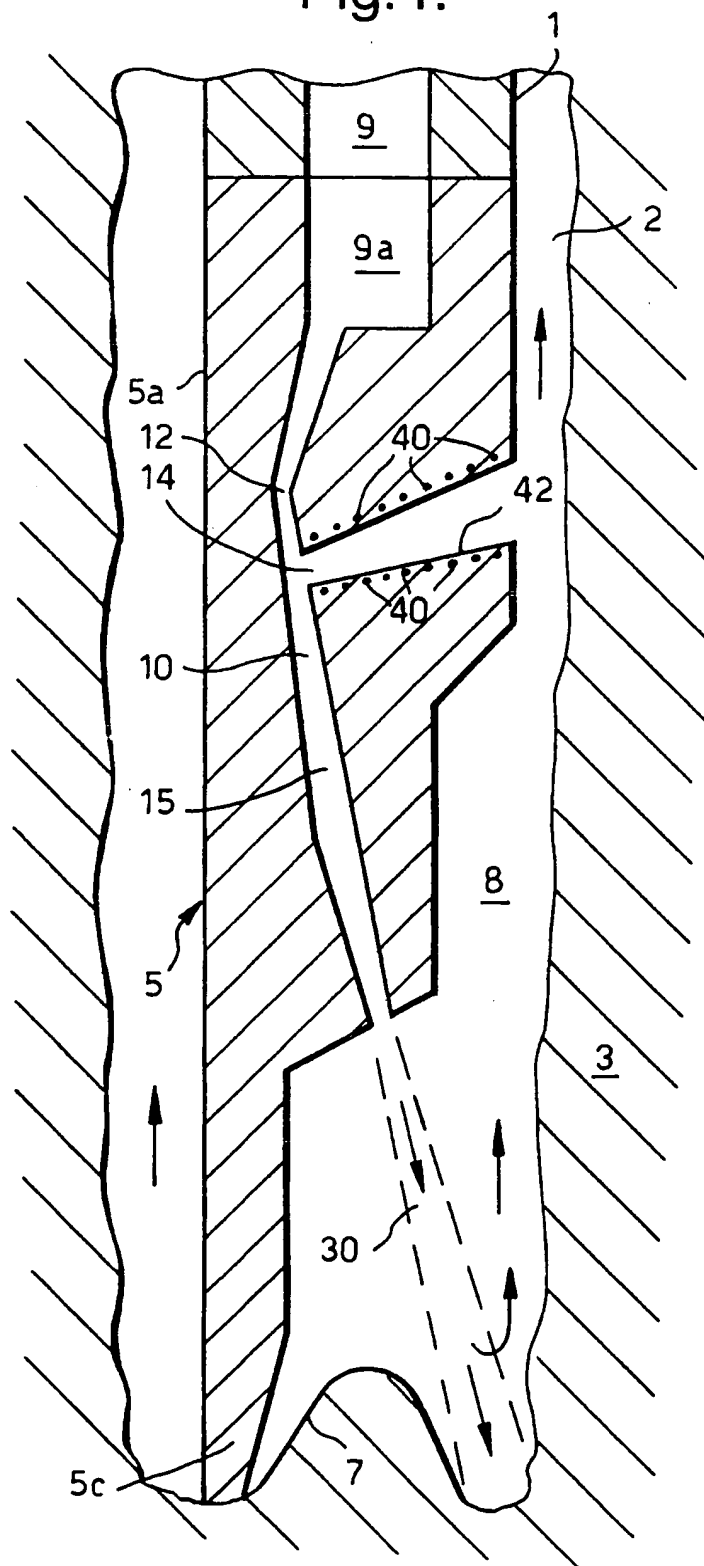

4/4

Fig.5.

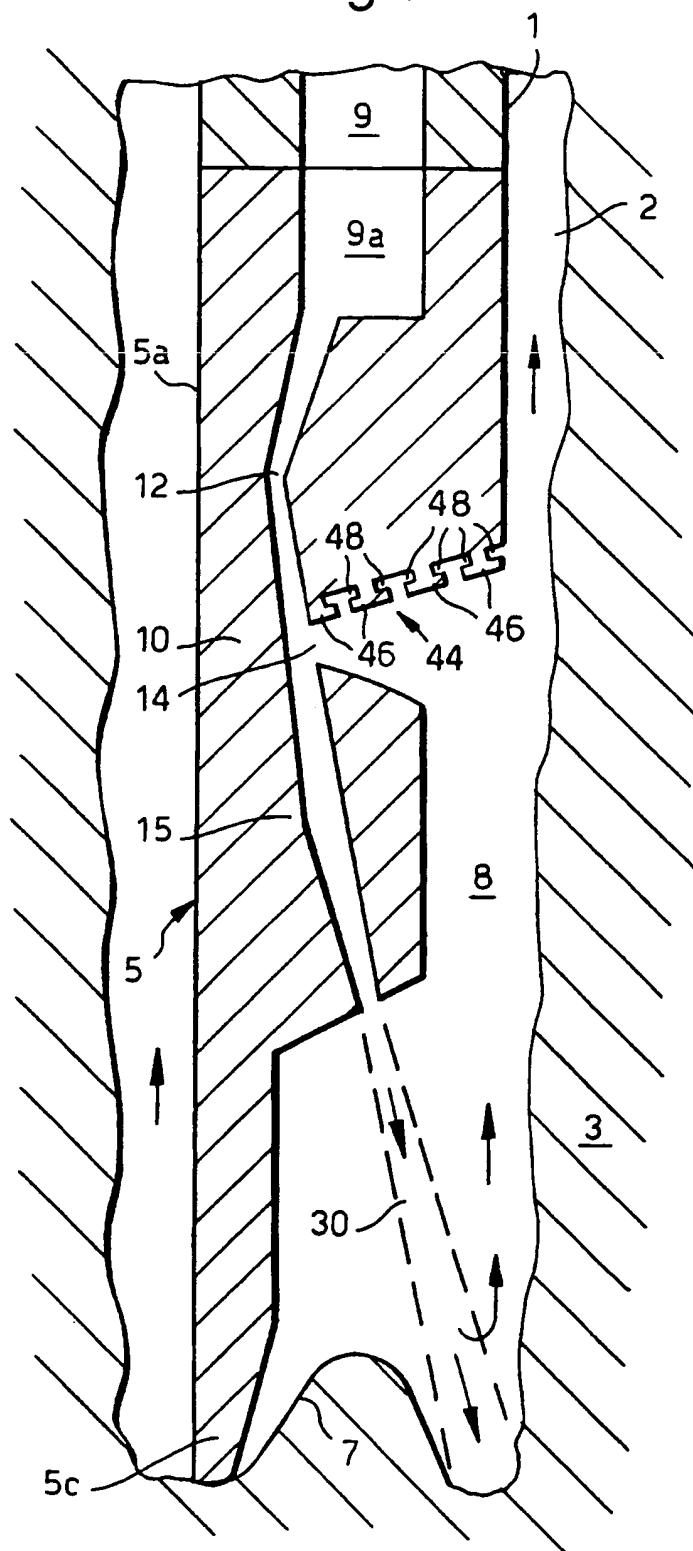

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/EP 00/04180

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 E21B7/18 E21B21/00 E21B10/64

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 534 427 A (WANG FUN-DEN ET AL) 13 August 1985 (1985-08-13) abstract; figures	1
A	US 4 042 048 A (SCHWABE WILLIE CARL) 16 August 1977 (1977-08-16) column 2, line 12 - line 40; figures	1
A	US 4 688 650 A (HAYATDAVOUDI ASADOLLAH ET AL) 25 August 1987 (1987-08-25) abstract; figures	1
A	GB 2 206 508 A (TELECO OILFIELD SERVICES INC) 11 January 1989 (1989-01-11) abstract; figures	1
	-/-	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

13 July 2000

Date of mailing of the international search report

19/07/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Weiland, T

INTERNATIONAL SEARCH REPORT

Int'l. Application No.

PCT/EP 00/04180

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E	WO 99 22112 A (BAKER HUGHES INC) 6 May 1999 (1999-05-06) abstract; figures page 7, line 7 - line 11	1
A	US 3 838 742 A (JUVKAM WOLD H) 1 October 1974 (1974-10-01) cited in the application abstract; figures	1

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/EP 00/04180

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 4534427	A	13-08-1985	NONE		
US 4042048	A	16-08-1977	NONE		
US 4688650	A	25-08-1987	NONE		
GB 2206508	A	11-01-1989	US	4857175 A	15-08-1989
			DE	3822896 A	27-07-1989
			FR	2617898 A	13-01-1989
			NO	882979 A	10-01-1989
WO 9922112	A	06-05-1999	AU	1282399 A	17-05-1999
			GB	2336614 A	27-10-1999
			NO	993175 A	25-08-1999
US 3838742	A	01-10-1974	CA	986088 A	23-03-1976
			GB	1446828 A	18-08-1976

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 November 2000 (09.11.2000)


PCT

(10) International Publication Number
WO 00/66872 A1

- (51) International Patent Classification⁷: **E21B 7/18**,
21/00, 10/64 **B.V. [NL/NL]; Carel Van Bylandtlaan 30, NL-2596 HR
The Hague (NL).**
- (21) International Application Number: **PCT/EP00/04180** (71) Applicant (for CA only): **SHELL CANADA LIMITED**
[CA/CA]; 400 - 4th Avenue S.W., Calgary, Alberta T2P
2H5 (CA).
- (22) International Filing Date: **27 April 2000 (27.04.2000)**
- (25) Filing Language: **English** (72) Inventor: **BLANGE, Jan, Jette**; Volmerlaan 8, NL-2288
GD Rijswijk (NL).
- (26) Publication Language: **English** (81) Designated States (national): **AE, AG, AL, AM, AT, AU,**
AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE,
DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU,
ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS,
LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ,
PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT,
TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (30) Priority Data:
99303307.5 28 April 1999 (28.04.1999) **EP**
- (71) Applicant (for all designated States except CA): **SHELL
INTERNATIONALE RESEARCH MAATSCHAPPIJ**

[Continued on next page]

(54) Title: **ABRASIVE JET DRILLING ASSEMBLY**

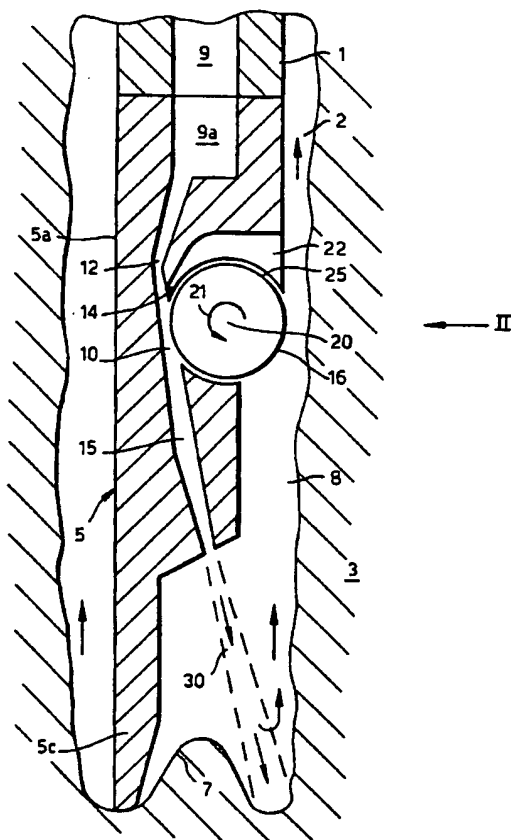

(57) Abstract: A drilling assembly for drilling a borehole into an earth formation is provided, comprising drill string extending into the borehole and a jetting device arranged at a lower part of the drill string, the jetting device being provided with a mixing chamber having a first inlet in fluid communication with a drilling fluid supply conduit, a second inlet for abrasive particles and an outlet which is in fluid communication with a jetting nozzle arranged to jet a stream of abrasive particles and drilling fluid against at least one of the borehole bottom and the borehole wall. The jetting device is further provided with an abrasive particles recirculation system for separating the abrasive particles from the drilling fluid at a selected location where the stream flows from said at least one of the borehole bottom and the borehole wall towards the upper end of the borehole and for supplying the separated abrasive particles to the second inlet.

WO 00/66872 A1



(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(48) Date of publication of this corrected version:

29 March 2001

(15) Information about Correction:

see PCT Gazette No. 13/2001 of 29 March 2001, Section II

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

NO. 13/2001

HIS PAGE BLANK (USPTO)